

Front & rear disc mowers
NOVADISC, NOVACAT

 **PÖTTINGER**

First class cut





First class cut



All information on technical data, dimensions, weights, output, etc. and the images shown, are approximate and are not binding. The machines shown do not feature country-specific equipment and may include equipment that is not supplied as standard, or is not available in all regions. Your PÖTTINGER dealership would be pleased to provide you with more information.

A precision mowing process is the starting point for first class forage quality. Farmers expect the best-possible ground tracking, minimal disintegration losses and precision mowing without wasting any time in the field. Our NOVACAT front and rear disc mowers guarantee clean forage thanks to their excellent ground tracking and weight alleviation. Something your livestock will appreciate.

Table of contents

	The best forage	4
	Clean and tidy cut	6
	Cutter bar	6
	Durability	10
	TRI DRIVE concept	10
	Convenience	12
	Clean and tidy conditioning	14
	ED tine conditioner / RC roller conditioner	14
	Front mounted mowers	18
	NOVACAT F light front mowers	20
	NOVACAT ALPHA MOTION front mowers	24
	Rear mounted mowers	28
	NOVADISC rear mower with side pivot mounting	30
	NOVACAT rear mowers with centre pivot mounting	34
	CROSS FLOW auger	38
	Digital agricultural machinery	40
	Software	40
	Compatible products	42
	SENSOSAFE	42
	Equipment options	44
	Technical data	46

The best forage



The best quality basic ration is the basis for your success

The production of high-quality basic ration from meadows, pastures and whole crop is the basis of every grassland farm. Ruminants are fussy about their forage.

The quality of their basic ration will determine whether your animals consume the forage in high quantities, or not.

In addition to energy content, odour and taste, a low crude ash content plays a critical role.

They go for a basic ration that is clean and nutritious. The amount of concentrates used can be reduced.

This cuts feeding costs while at the same time improving animal health. The bottom line is that you benefit from clean, high quality forage with more profit from your farm business.

Yet producing the best forage is not done by coincidence. The foundation for this is laid by the botanical composition of the crop. The volume and quality yielded here must be maintained along the entire harvest chain.

The basis for clean forage

A mowing process that conserves the grass is the best basis for clean forage. Ultimately, this is about maintaining the correct cutting height of 6 – 8 cm. That is how crude ash ingress is reduced to a minimum right from the start of the harvest chain. Subsequent harvesting machines then do not have to work so close to the ground to collect the forage cleanly. At the same time, sufficient residual assimilation area remains for the grass to grow again more quickly.

If the ground is not level, it is essential that the mower has good ground tracking capabilities.

This is important for maintaining the set cutting height and preventing dirt ingress as the first cause of forage contamination.

Thanks to their unique ground tracking system, optimum weight alleviation of the cutter bar, and excellent cutting quality, our mowers give you the basis for a clean forage harvest and rapid regrowth of the plants.

NOVADISC, NOVACAT



“Clean cut and clean forage”

“We have 70 dairy cattle on our farm. The quality of the forage is very important to us and that’s why we take great care to make sure the mown crop is clean. The ground tracking of our PÖTTINGER rear and front mowers on our very hilly terrain is outstanding. We also appreciate the robustness and cost effectiveness of our mowers. They are easy to hitch and easy to operate. When hitching up we particularly appreciate the hydraulic lower linkage arm of our NOVACAT rear mower because it enables easy mounting without having to adjust the linkage struts on the tractor.”

Pierre-Yves Michel
Managing Director of GAEC Des Cours
Domsure | Auvergne-Rhône-Alpes | France

Best forage for Merino sheep

Christian Bäck is a farmer with heart and soul. On his farm in Austria he keeps a breed of Merino, the Merinolandschaf. His farmland is very rough in parts and for this reason it is essential that his grassland machines provide perfect ground tracking.

Since 2018 Bäck has relied on the NOVACAT ALPHA MOTION MASTER front mower.

“In my view, a machine’s ground tracking is the be-all and end-all, especially with a front mower. Before I bought the mower I had heard that the ALPHA MOTION just flies over the meadow.”

Christian Bäck
Farmer
Mühlviertel | Upper Austria | Austria

Clean and tidy cut

Cutter bar



One harvest leads to another

What counts is a clean and tidy cut. By slicing through assimilating parts of a plant during forage harvesting, the plant is subjected to considerable injury. Through its wounds, the plant loses water containing dissolved nutrients.

The faster the cut heals, the lower the losses. The plant will soon be able to focus on growing and forming leaf mass again. Rapid growth of the crop after harvest lays the foundation for high annual yields per hectare.

What counts is the best quality cut, and that is why the PÖTTINGER cutter bar was developed.

PÖTTINGER cutter bars – quality made in Austria

These cutter bars are proven thousands of times in the field and are at the heart of every disc mower made by PÖTTINGER. The extremely flat welded cutter bar with clamped mower blades produces clean forage, cut after cut. They are developed and built at the company's main plant in Grieskirchen – a quality product made in Austria.

Sleek and dynamic design

The PÖTTINGER cutter bar features an impressively sleek and dynamic design. The 4 cm high cutter bar guarantees optimum crop flow. And because it is only 28 cm wide, it delivers the best ground tracking – ideal for achieving a first class cut.

Clean forage

The streamlined leading edge of the cutter bar allows the soil to flow underneath, separating it cleanly from the crop. Cleaning paddles prevent dirt from accumulating on the upper surface. The rounded disc surfaces improve the conveyor effect across the cutter bar.



Welded construction

The key to the cutter bar's compact and sleek design, and all its advantages, is its precision-welded construction. This guarantees supreme robustness while maintaining compactness.

Another advantage of the welded cutter bar is that the gear oil remains permanently where it should be; in the gearbox. Even after years of use, the cutter bar remains tight, so there are no oil leaks.

Clamped blades – for a tidy mowing pattern

The clamped mower blades create a tidy mowing pattern. They rotate very close to the surface of the cutter bar and the counter knife. This guarantees clean and tidy cutting even in damp and muddy conditions.

The blades are locked securely in place by powerful spring clips. What is more, they are easy to change. The blade pin is bolted to the mower disc, and can be inexpensively replaced if need be. The counter knife is also clamped in place, so it is easy to replace.

The optimised overlap of blade paths ensures a clean and uniform mowing pattern.

- 1 Integrated cleaning paddles
- 2 Clamped blade
- 3 Clamped counter knife

Clean and tidy cut

Cutter bar



Customised equipment

There are multiple factors that go into achieving a clean and tidy cut. We offer numerous equipment options for cutter bars to meet your individual requirements.



Smooth, rounded underside

Wide glide bars made from hardened boron steel to resist impact and prevent the build-up of soil. Because the underside of the cutter bar is smooth with contoured glide bars inside and outside, it protects the sward even when cornering.

Wear skids

As an option, you can fit additional wear skids to protect the underside of the cutter bar. The bolted skids can be easily changed if required.



High cut skids


With the optional high cut skids, cutting heights of 50 – 120 mm are possible. Their large radius and wide surface area make them especially wear-resistant. In addition, the sward is conserved as a result.

- High cut skids +20 mm
- High cut skids +40 mm
- High cut skids also for both outer glide bars



Feed cone

The dynamic shape of the feed cone keeps the crop flowing. In addition, swath doors can be fitted.

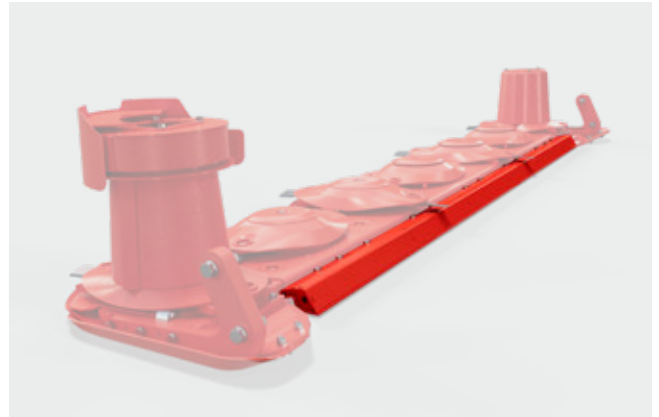

HEAVY DUTY cutter bars

An additional cutter bar reinforcement is optional for especially stony areas.

(Standard on NOVACAT 402 / 442)




Swathing discs

Our front-mounted mowers without conditioners are fitted with two swathing discs as standard. They are also available as an option for the rear mowers.

The generously dimensioned, individually adjustable swathing discs place the forage loose and light in a swath that is the width you need. Additional swath formers are available for even narrower swath placement.

Durability

TRI DRIVE concept

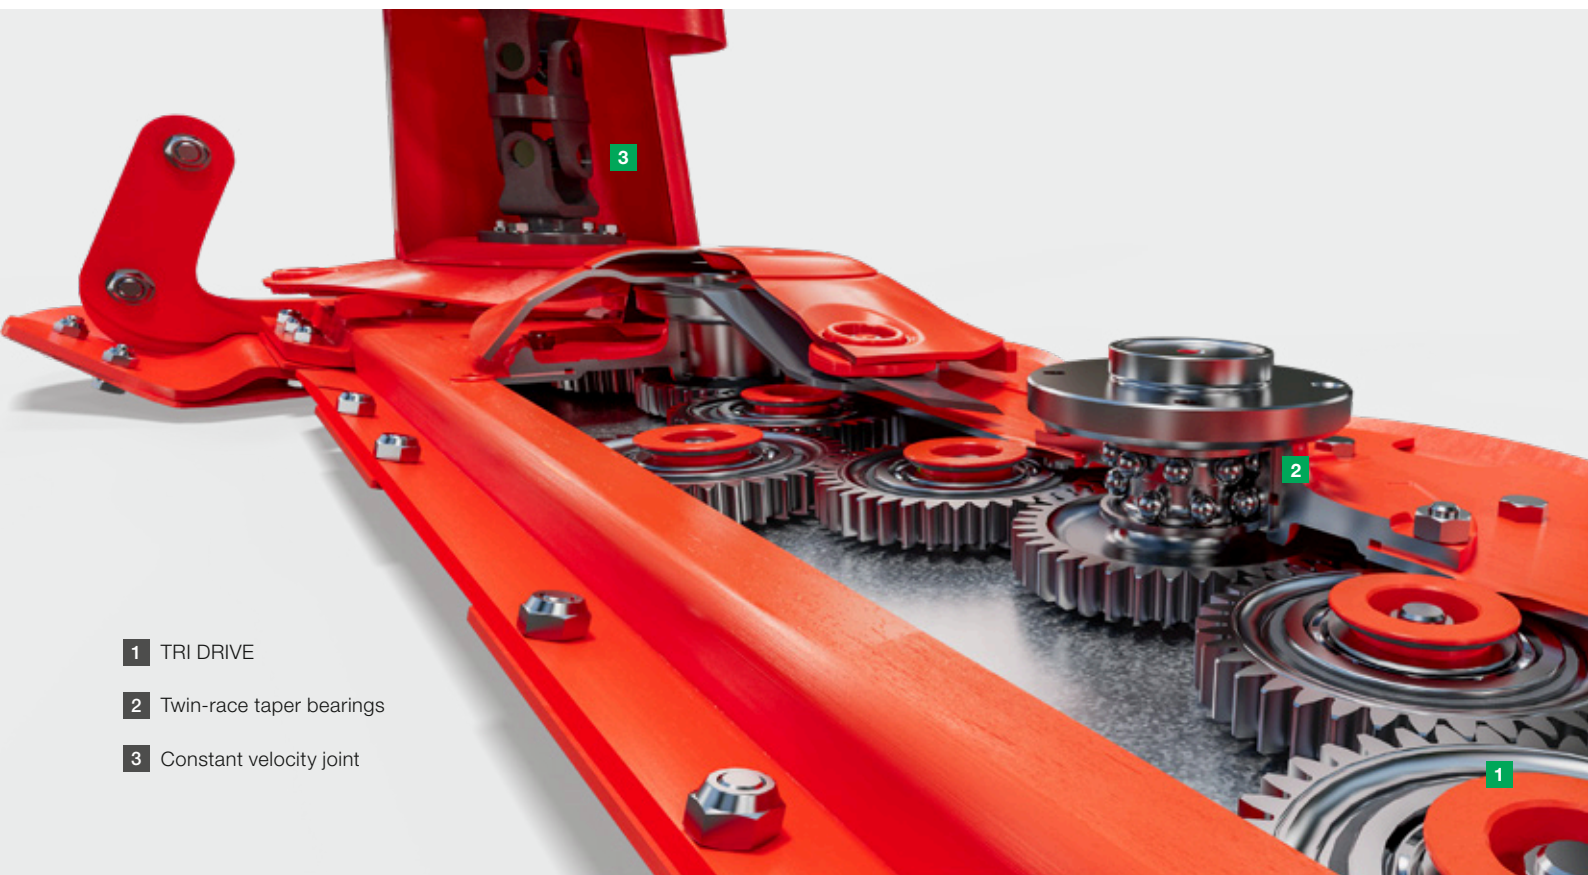

- 1 TRI DRIVE
- 2 Twin-race taper bearings
- 3 Constant velocity joint

For a long life

When harvesting forage, what counts is sturdy machinery you can depend on. At PÖTTINGER we use only high quality components in the manufacture of our mowers. Ingenious details make the NOVADISC and NOVACAT disc mowers uniquely reliable. So that you can begin every forage harvest trouble free for years to come.

It starts with the cutter bar: This is made from the best quality steel. The metal plates are laser-cut and robot-welded with the greatest precision.

The extremely hard-wearing PÖTTINGER driveline is at work inside the robust cutter bar.

The unique TRI DRIVE drive concept is designed to ensure maximum service life.

High quality cathodic dip priming and powder coating guarantee elasticity and durability. Featuring eye-catching colours and a modern design, you are sure to enjoy working with these machines that retain their value.

TRI DRIVE concept

The driveline in the PÖTTINGER cutter bar is famed for its toughness and durability.

3 teeth are always in contact

The spur gear drive runs in a straight line with virtually the same sized gears. On the gears there are always three teeth in contact with each other – this ensures optimum power transmission. Moreover, there is less stress on the individual gears in the event of stone impact.

The specially ground surface of the gears submerged in gear oil ensures smooth running. This reduces the noise level considerably.

- Gear set 39/50
- Gear height 17.5 mm



Smooth-running driveline

A standout feature of our mowers is their supremely smooth running. The NOVACAT series features a friction-locked drive train directly to the first mower disc.

A constant velocity joint provides a stress-free link between the angular gearbox and the cutter bar.

Our NOVADISC mowers are driven by V-belts tensioned by a back tension idler to deliver reliable and smooth power transmission. An angular gearbox behind the first mower disc then transmits the power to the cutter bar.

On all mowers, a freewheel is integrated into the driveline.

Practical modular design

Bevel gears and bearings can be removed as a single unit. The idler gears are also easily removed through the openings: it couldn't be easier!

The bearing flange and fittings are reliably protected by rubber o-ring seals. This prevents dirt or dust from entering the gearbox. It also avoids oil leakage.

Heavy-duty bearings

The stub shafts of the individual mower drums have heavy-duty bearings. Durable, twin race taper bearings with a bearing spacing of 60 mm are extremely stress-resistant. Shock loads are absorbed effortlessly. The high-strength stub shafts are bolted to the gears. Each of the parts can easily be replaced if required.

- 1 Shaft stub
- 2 Taper bearing
- 3 Bearing flange
- 4 Spur pinion

Convenience



Making mowing a pleasure

What you enjoy, you do well. That's why using machinery that makes the work enjoyable is all the more important. At PÖTTINGER, we therefore place great importance on convenient operation and above all straightforward maintenance.

Simply low-maintenance

Our engineers have made sure that you can keep your mowing machines in peak condition with a minimum of effort. Long greasing intervals and easily accessible greasing points allow you to make efficient use of harvest time, which is often very short.

The guards fold well and easily away to provide optimum access to the cutter bar. Blades can be changed quickly and easily.



Practical folding guards

The guard curtains are made from especially tough material to reliably catch stones and soil.

The guards fold well away easily to provide optimum access to the cutter bar. There is nothing in the way during cleaning, and when changing blades quickly and easily.

Blade changing in record time

The PÖTTINGER quick-change blade system makes replacing mower blades straightforward and simple. Just press down the spring clip with the blade wrench and replace the blade.

A handy blade box on the headstock provides space for replacement blades. The blade tool is always kept on the mower.

The blade is locked securely in place by the spring clip. The blade pin is bolted to the mower disc. This can be replaced cost-effectively if required.

Clean and tidy conditioning

ED tine conditioner / RC roller conditioner



Accelerate drying

Plants have a waxy coating to protect them from drying out. The necessary gas exchange with the ambient air is regulated only by stomata; microscopic openings in the leaves and stem. Immediately after mowing, these openings close to protect the plant. This means that during drying, water can only escape through the less permeable waxy coating.

The conditioner has the job of breaking up the waxy layer of the mown crop, which brings about two major advantages. The mowed crop dries faster. Less nutrients are lost by reducing the time the crop is left wilting in the field. In addition, this also facilitates the release of cell juice in the clamp. This results in faster pH value reduction. What this means is that the silage reaches a stable state more quickly.

For the best working results, a conditioner must be chosen that suits the crop to be mown. For crop with high grass content, for example, the ED tine-type conditioner achieves good results. It hits the stalks in the crop. For especially leafy forage, the RC roller conditioner is recommended. This conditioner crimps the crop.

Adapted to the season

In the hot summer months, when there is little plant mass in the crop, there is often a risk that the mown grass dries out too quickly if it is mowed with a conditioner. During silage preparation, this can be difficult to compact in the clamp and lead to lactic acid fermentation.

Studies have also shown that there are significantly more insects in grassland stands in the summer growth phases in June and July. That is why the conditioner has a bad reputation concerning the mortality rate of insects.

So while mowing with a conditioner makes sense in several respects in spring and autumn, the need for a conditioner may well be questioned in summer.

Quick-change conditioner

That is why at PÖTTINGER we recommend a system that allows you to use the same mower with or without conditioner. Swapping around can be done in just a few simple steps.




1 mower – 3 possibilities

Thanks to the optional quick-change kit, the tine conditioner or roller conditioner can be removed in a short time on many mowers.

You can switch between the tine and roller conditioner in just a few steps, or install a guard curtain:

- Take off the V-belts
- Fit the conditioner trolley
- Undo the conditioner fastenings
- Remove the conditioner
- Fit guard curtain / alternative conditioner

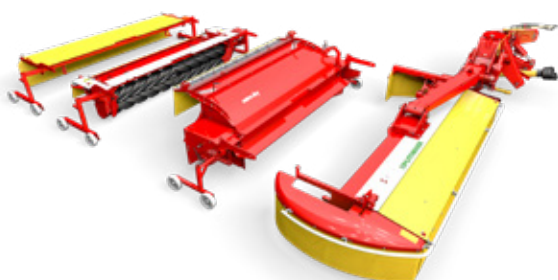

Placement strategies


Thanks to their adjustable swath doors, both conditioner systems can either spread the crop wide or forming a swath, depending on the specific requirements.

Wide placement offers the advantage that because the forage is in an airy loose blanket, the tedder can either be omitted, or drying can be shortened by 2 – 5 hours with a subsequent tedding process.

In the case of hay, the wide placement makes a 2-day harvesting process possible by drying quickly from the start and greatly minimising the weather risk.

Clean and tidy conditioning

ED tine conditioner / RC roller conditioner

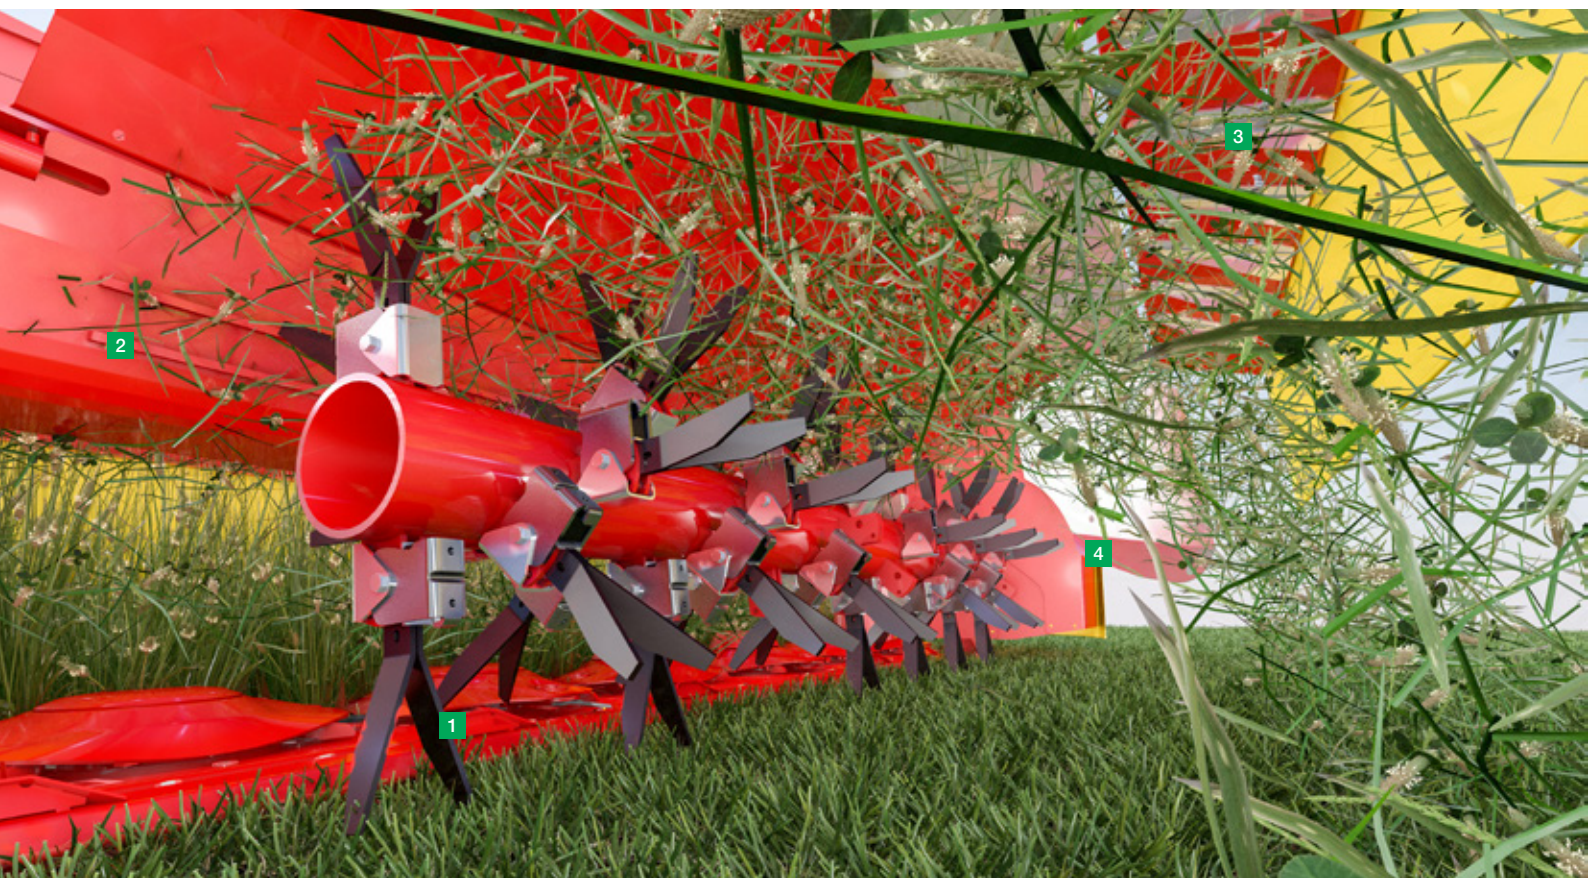

ED tine-type conditioner

The EXTRA DRY conditioner is a joint development with the Institute of Agricultural Engineering (IMAG-DLO) in Wageningen (Holland) that started in 1997 to prove there is better way.

Fast, uniform drying

- 1** V-shaped tines made of hardened steel hit the stalks in the crop and guarantee a continuous flow of forage.
- 2** You can flexibly adjust the conditioning intensity by changing the gap between the tines and the counter flap.
- 3** The round, high volume conditioner hood and the adjustable guide vanes enable a loose and airy blanket to be placed.
- 4** Adjustable swath doors can be used either for a wide spread blanket or to form a swath, depending on individual requirements.

Long service life

The tines are mounted on rubber blocks that are designed to flex, enabling them to fold back if they collide with obstacles.

Depending on the model, power is transmitted from the cutter bar gearbox to the rotor by a powerband or V-belts with a spring-loaded belt tensioner. This guarantees low weight and a smooth-running drive system.

The greasing point is located externally for easy access.





RC roller conditioner

The ROLLER CONDITIONER is especially suitable for alfalfa and clovers due to its precision conditioning capabilities. The helix shape angular groove profile has a high bending and squeezing effect and guarantees perfect forage transfer from the cutter bar.

Careful and effective

- 1** The rollers inter-mesh to uniformly crimp the stalks and produce a uniform blanket of forage. Roller spacing is variable thanks to the height-adjustable upper roller. The conditioning pressure can be adjusted on both sides using a hand crank. If foreign objects enter between the rollers, the gap can open by up to 120 mm.
- 2** Adjustable swath doors ensure airy and uniform swath formation.
- 3** Adjustable swath doors can be used either for a wide spread blanket or to form a swath, depending on individual requirements.

Reliable and durable

The Polyurethane profile is vulcanised onto the robust central tube of the roller giving an external diameter of 200 mm. The conditioner profile is tougher than rubber and therefore particularly resistant to wear.

Power is transmitted from the cutter bar gearbox to the rotor by V-belts with a spring-loaded belt tensioner. Both rollers are driven synchronously by a swivel gearbox for maximum throughput. This has a robust construction and is designed for the toughest conditions.

A central greasing point makes servicing easier.



Front mounted mowers





Front mounted mowers

NOVACAT F light front mowers



Smooth mowing

Our NOVACAT F front mounted mowers ensure that your mowing is smooth and cost effective.

This series is the ideal mix of low weight and the highest strength. You can use these mowers everywhere: with compact tractors on steep slopes or with large tractors with a mower combination.

The NOVACAT F models are available with working widths of 2.62 metres or 3.04 metres. We also offer a headstock with our OPTICURVE integrated side shift system for the NOVACAT F 3100 OC.

Short headstock

The trademark of this front mower is its compact three-point linkage mounted headstock. The centre of gravity is now very close to the tractor, making it easy to use even with small tractors. The low headstock and the tarpaulin guard sloping outwards guarantee the best possible view.

Matches every tractor

For larger tractors, an adapter is available as an option to give a 100 mm higher mounting position. This ensures an optimum lower linkage position for optimum weight alleviation. In addition, the PTO shaft is at less of an angle during operation.

	Working width	Mower discs	Headstock
NOVACAT F 2700	2.62 m	6	without side shift
NOVACAT F 3100	3.04 m	7	without side shift
NOVACAT F 3100 OC	3.04 m	7	with side shift



NOVADISC, NOVACAT



Perfect ground tracking

Gimbals in the guide arms of the cutter bar guarantee multi-dimensional and smooth freedom of movement. The arc of movement of +/- 8 degrees allows the mower to float precisely over all undulations in the ground.

The compact cutter bar and the position close to the tractor's front axle also ensure excellent ground tracking on the longitudinal axis.



Rapid-Reaction Spring-activated floating

The weight of the mower is carried either by the tractor hitch, or optionally by two strong suspension springs between the headstock of the mower and the mounting bracket on the tractor.

The chain length can be used to quickly optimise ground pressure. Ideally, this is approx. 150 kg. Because this means:

- Perfect cut and clean forage
- Minimal wear and power requirement
- Perfect steering of the tractor especially on steep ground.

Convenient maintenance

The guards fold away to provide optimum access to the cutter bar. This makes it possible to clean the machine thoroughly and change blades quickly and easily.

The mower discs rotate into the centre

On all three NOVACAT F models, all mower discs rotate inward as standard. This promotes the flow of forage over the cutter bar and supports swath formation by placing the forage within the tractor track. In addition, it works very reliably when mowing downhill.

Safe road transport

The cutter bar is stabilised by centring springs when raised. This prevents the unit from swaying.

For safe road transport, the side guards are folded upwards. Hydraulic folding is available if required. Warning signs and road lights are optional.

Front mounted mowers

NOVACAT F light front mowers





OPTICURVE

The NOVACAT F 3100 OC is equipped with an arc-shaped side shift system.

If the tractor drifts sideways when cornering or on steep terrain, the shift system ensures that the rear tyre of the tractor does not run over grass that has not been cut yet. As a result, no grass remains unmown due to insufficient overlap with the rear mower. During zero grazing mowing and loading, the loader wagon also travels in a forage-free track.



Arc-shaped side shift

A hydraulic cylinder shifts the mower in an arc up to 20 cm to the left or right. This changes the angle of the cutter bar by up to 8°.

The curved design makes it possible to use the entire width of the cutter bar, while systems with a straight shift leave several centimetres standing.

The side shift system is controlled using a double-acting spool valve as standard.

Compact design

Thanks to its ingenious design, mowers featuring the side shift system weigh almost the same as the rigid version. The mechanical elements are fully integrated into the headstock. As a result, the centre of gravity remains very close to the tractor.

The cutting height remains consistent over the entire arc.

The NOVACAT F 3100 OC achieves a working width of 3.04 metres.

Profiline comfort control system

With the optional Profiline comfort control system, the mower steers left and right automatically depending on the turning angle of the tractor or the inclination of the slope.

The signals needed to achieve this are provided by an acceleration sensor on the mower and optionally by the steering angle sensor on the tractor.

The system is controlled either using your ISOBUS terminal or the SELECT CONTROL terminal. Hydraulic oil is supplied by a load-sensing or power beyond system.

Front mounted mowers

NOVACAT ALPHA MOTION front mowers



Clean and tidy mowing

Best adaptation to any ground contour is a bold claim. ALPHA MOTION is our clear answer.

What counts is a neat and tidy mowing pattern and the best forage for your livestock. Our NOVACAT ALPHA MOTION front mowers tick all the boxes.

Smaller fields with bumps or large areas where you want to accelerate: you will always leave a neatly mown crop behind you, laying the foundation for quality forage.

The NOVACAT ALPHA MOTION models are available with working widths of 2.62 m / 3.04 m / 3.46 m.

Unique ground tracking

ALPHA MOTION trailed front technology is characterised by the sophisticated kinematics of the active support frame. Compared to other mounting systems, not only do the guide arms respond to every undulation of the terrain, but also the support frame itself.

As a result, the cutter bar inclines upwards over bumps and slants downwards into dips. The result: clean forage. You also benefit from a consistent cutting height, which leads to uniform growth and ultimately to higher yield for you.

	Working width	Mower discs
NOVACAT 261 ALPHA MOTION MASTER / PRO	2.62 m	6
NOVACAT 301 ALPHA MOTION MASTER / PRO	3.04 m	7
NOVACAT 351 ALPHA MOTION MASTER / PRO	3.46 m	8



The right model for everyone

Depending on your requirements, the field-proven NOVACAT ALPHA MOTION is available with two different headstocks. The ALPHA MOTION MASTER and the ALPHA MOTION PRO. On both models the centre of gravity is close to the tractor in all working positions. You mow smoother as a result.

On both models, the side guards can be hydraulically folded conveniently from the tractor seat as an option. Using an optional hydraulic hose and sensor package, ALPHA MOTION front mowers can be conveniently operated using the electronic control terminal for NOVACAT mower combinations.



ALPHA MOTION MASTER

The NOVACAT ALPHA MOTION MASTER front mower impresses with its extremely compact design and three-point headstock. It's 34 cm closer to the tractor than the ALPHA MOTION PRO.

This means that more weight rests on the tractor's rear axle and handling is improved.

In addition, the mower is lighter and

can be used with no difficulty by lighter 3 and 4 cylinder tractors. This helps you save fuel.

A conditioner is not available on this model.

ALPHA MOTION PRO


The NOVACAT ALPHA MOTION PRO front mower offers maximum operating convenience along with the first-class ground tracking you expect from our machinery.

- The three-point linkage ensures easy attachment to any size of tractor.
- The front guard folds up using just one lever and enables optimum access to the cutter bar for cleaning and blade changing.
- The headstock cover is easy to remove. This enables easy adjustment of the suspension springs.
- A central greasing point on the headstock makes servicing easier.

You can use the NOVACAT ALPHA MOTION PRO models without conditioner with swath doors or in combination with an ED tine conditioner or RC roller conditioner.

Front mounted mowers

NOVACAT ALPHA MOTION front mowers

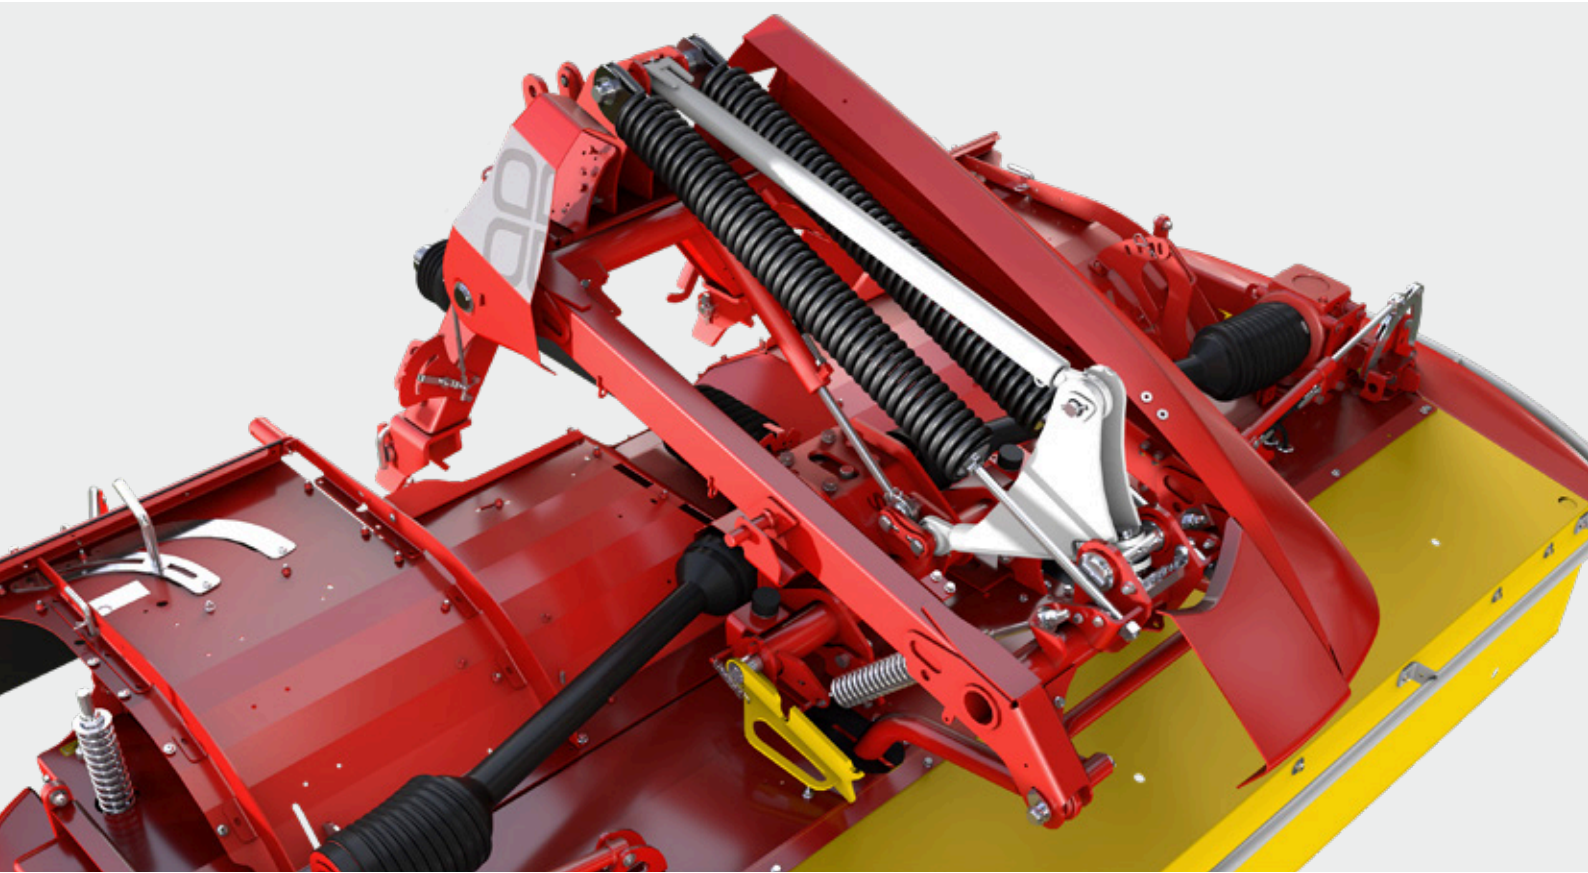

Excellent inclination adjustment

The active support frame and link rods guide the cutter bar over every undulation.

This unit reacts fast as lightning: The cutter bar rises to float over each bump and glides down into each dip. The mower moves virtually on a vertical plane, minimising telescoping of the PTO shaft and greatly reducing dynamic stress.

- NOVACAT ALPHA MOTION PRO: $-9^\circ / +12^\circ$
- NOVACAT ALPHA MOTION MASTER: $-7^\circ / +13^\circ$

Generously proportioned suspension springs

Two large suspension springs are integrated into the headstock. These react quickly to any bump in the ground, which means that weight alleviation remains virtually the same over the mower's entire working distance. This ensures uniform pressure on the ground of approx. 150 kg and protects your soil in the best possible way.

The mower can be driven at high speed without the cutter bar rising.





Transverse movement

ALPHA MOTION stands for three-dimensional ground tracking with tremendous freedom of movement. Gimbals in the guide arms enable unique +/- 16° of transverse movement.



Always the right mounting height

Both our MASTER and our PRO models have a correct mounting indicator fitted to the right-hand side of the headstock. This is clearly visible from the driver's seat.

Correctly positioning the front hitch guarantees perfect ground tracking and uniform ground pressure over the mower's entire working distance.

High lifting clearance

High ground clearance of up to 35 cm at the headland and in the transport position guarantees that you can drive over swaths without damaging them and facilitates transport of the mower on bumpy tracks.

When driving on roads you can also raise the mower even higher using the tractor's front linkage. When you next use the mower, the indicator on the headstock helps you to find the right height clearance for the front hitch.

Narrow headstock

You have a perfect view of the mowing area from the driver's seat. Because the headstock is narrow and slopes away from the tractor it aligns perfectly with the engine hood/bonnet.

Rear mounted mowers





Rear mounted mowers

NOVADISC rear mower with side pivot mounting



Cost effective and suitable for working on slopes

The NOVADISC mowers with side pivot mounting are our lightweights to the rear. Their standout feature is their smooth running.

The demand for effective suspension to optimise ground tracking has also been met in full by our NOVADISC.

The NOVADISC rear mowers are available with working widths of 2.20 m / 2.62 m / 3.04 m / 3.88 m / 3.46 m.

Lightweight construction with high rigidity

The NOVADISC rear mowers offer high strength with the lowest weight. They are the lightweights in their class. These mowers can be used by smaller tractors from only 40 hp upward. This means you save fuel and mow smoothly.

The lightweights are ideal for use on slopes. In addition, they are eminently suitable for mowing embankments.

	Working width	Mower discs
NOVADISC 222	2.20 m	5
NOVADISC 262	2.62 m	6
NOVADISC 302	3.04 m	7
NOVADISC 352	3.46 m	8



NOVADISC, NOVACAT



Adaptable side pivot mounting

The wide $+22^\circ / -30^\circ$ arc of movement enables easy mowing on rough ground and embankments. Mowing up to $+45^\circ$ by lifting the interlock latch is possible for short periods.



Unique weight alleviation springs

Two suspension springs guarantee the cutter bar applies hardly any pressure to the ground.

The unique kinematics ensure that the cutter bar applies the same pressure to the ground over the entire width.

Adjustable ground pressure

The ground pressure can be adapted flexibly to individual operating conditions. Weight alleviation is adjustable in three stages without the need for tools. This enables you to keep wear and power requirements as low as possible.

NOVADISC lifting system

The mower is lowered so that the outer end of the cutter bar contacts the ground first. At the headland, the inside end is lifted first. That is how your sward is perfectly protected.

Rear mounted mowers

NOVADISC rear mower with side pivot mounting



Collision safety device

To protect your machine, the cutter bar can fold right back if it collides with obstacles. The mechanical collision safety system provides a swing arc of approx. 12°. After it has been triggered, simply reverse a short distance to engage the cutter bar again.

Cutter bar mounted from both ends

The cutter bar is mounted from both ends which protects it against twisting. As a result, the gears and bearings are subjected to less stress to guarantee smooth operation and a long service life.



Cutter bar with durable driveline

The compact driveline and drive belt tension regulated by a back tension idler ensure robust and reliable power transmission. A freewheel is integrated into the gearbox.

Cutter bar without inside shoe

A key feature is the lightweight cutter bar without inside shoe. The cutter bar gearbox is behind the first mower disc. This means you can mow into corners and over rough ground with no difficulty.

NOVADISC, NOVACAT



Practical folding guards

The guards fold away to provide optimum access to the cutter bar. This makes it possible to clean the machine thoroughly and change blades quickly and easily. The guard curtains are made from especially tough material to reliably catch stones and soil.



Variable mounting

Thanks to the adjustable mounting pins, these mowers can be hitched up to your tractor quickly and easily. Two headstocks are available for outer track widths of 1800 – 2200 mm and 2200 – 2600 mm.



Safe and practical transport

In the transport position, the mower is folded through 102°. This gives you a clear view to the rear through both rear-view mirrors. The optimised centre of gravity of the machine ensures safe and compact road transport. Using the optional hydraulic folding side guard, you can achieve the lowest possible transport height. Warning signs and LED lights are available as an option.



Space-saving parking

With the optional second parking stand, your mower can be parked vertically to save space.

Practical PTO shaft holder makes hitching up easier.

Rear mounted mowers

NOVACAT rear mowers with centre pivot mounting



Optimum ground tracking

Minimum ground pressure and perfect ground tracking – guaranteed by our NOVACAT rear mowers with centre pivot mounting.

The NOVACAT rear mowers are available with working widths of 2.62 m / 3.04 m / 3.46 m / 3.88 m / 4.30 m.

These mowers can be equipped with swathing discs or a conditioner to meet your individual requirements. Depending on the working width, the NOVACAT rear mowers are available with a vertical or horizontal transport position.

Floating cut

Since the mid-80s, our mower developments have focussed on the “floating cut”.

On the NOVACAT rear mowers with centre pivot mounting the cutter bar is evenly supported over the entire cutting width. Your mower floats over any ground contour. The mown crop remains clean and you also save fuel thanks to the reduced power requirement.

	Working width	Mower discs	Transport folding
NOVACAT 262	2.62 m	6	Vertical
NOVACAT 302	3.04 m	7	Vertical
NOVACAT 352 V	3.46 m	8	Vertical
NOVACAT 352	3.46 m	8	Horizontal
NOVACAT 402	3.88 m	9	Horizontal
NOVACAT 442	4.30 m	10	Horizontal



NOVADISC, NOVACAT



Adaptable centre pivot mounting

The wide +/- 22.5° arc of movement enables easy mowing on rough ground and embankments.



Effective weight alleviation

Hydraulic weight alleviation provides uniform ground pressure over the whole cutter bar width.

The pressure of the cutter bar on the ground can be infinitely adjustable depending on the condition of the ground and the conditioner or swath formers fitted.

Simply read the pressure gauge to see the ground pressure.

Maximum ground clearance


High ground clearance of 50 cm at the headland guarantees that you can drive over swaths without damaging them and facilitates manoeuvring around obstacles such as boundary posts.

Stabiliser cylinder

During lifting, the mower unit is steadied by a stabiliser cylinder. This prevents the unit from swaying. This makes it easier to drive over swaths and optionally offers greater stability during transport.

Rear mounted mowers

NOVACAT rear mowers with centre pivot mounting

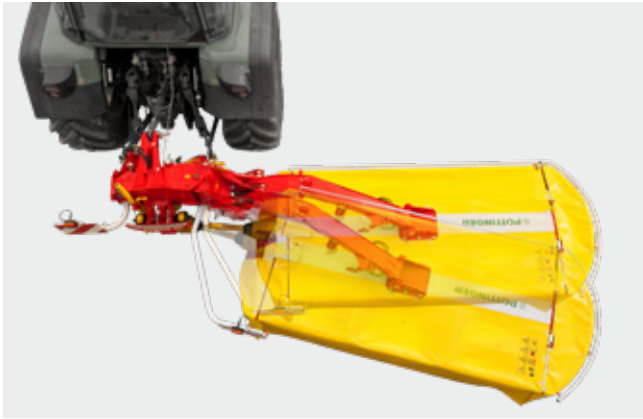

Collision safety device

To protect your machine, the cutter bar can fold right back if it collides with obstacles. The triggering pressure of the collision safety device is adjustable.

A mechanical collision safety device is integrated into the headstock as standard on the NOVACAT 262 / 302 / 352 V.

A hydraulic collision safety device is also available as an option. On the NOVACAT 302 CF / 352 / 402 / 442 the hydraulic collision safety device is standard.

Paddle and feed drums

Paddle drums at both ends of the cutter bar on the NOVACAT 402 / 442 place a neat swath leaving a tidy wheel track clear.

The swath can be divided with two feed drums (optional). The tractor can then drive along a cleared track instead of along the edge of the swath.



Counterweight to enhance driving safety

A counterweight is available as an option. The ballast is flexible up to 530 kg. This increases the load on the left rear wheel. In addition, it reduces the torsion on the hitch cylinder. Enhanced safety during driving is guaranteed.

2 mounting positions

For the NOVACAT 352 / 402 / 442 there are two possible mowing unit mounting positions. Turning the mounting through 180° allows maximum use of the working width with both a 3 m and a 3.5 m front mower.

NOVACAT 262 / 302 / 352 V are ideal for combining with 3 m front mowers.

NOVADISC, NOVACAT



Variable mounting

Thanks to the adjustable mounting pins, these mowers can be hitched up to a wide range of tractor types quickly and easily. As a result you make full use of the whole mowing width.

The practical PTO shaft holder makes hitching up easier.



Hydraulic lower linkage arm

The hydraulic lower linkage arm makes it easy for you to hitch up without having to adjust the linkage struts on the tractor. You also benefit from the right weight alleviation and optimum ground clearance at the headland.



Vertical transport position (NOVACAT 262, 302, 352 V)

A practical transport position is achieved by raising the mower through 115°. This keeps the transport height as low as possible. The view to the rear is unrestricted via both exterior mirrors. The optimum distribution of the centre of gravity ensures a pleasant drive.

Warning signs and road lights are standard.




Horizontal transport position (NOVACAT 352, 402, 442, 302 CF, 352 CF)

A narrow and low transport position is possible by folding the mowers backwards hydraulically. Now you can keep an eye on everything behind you during transport.

Warning signs and road lights are standard.

Rear mounted mowers

CROSS FLOW auger

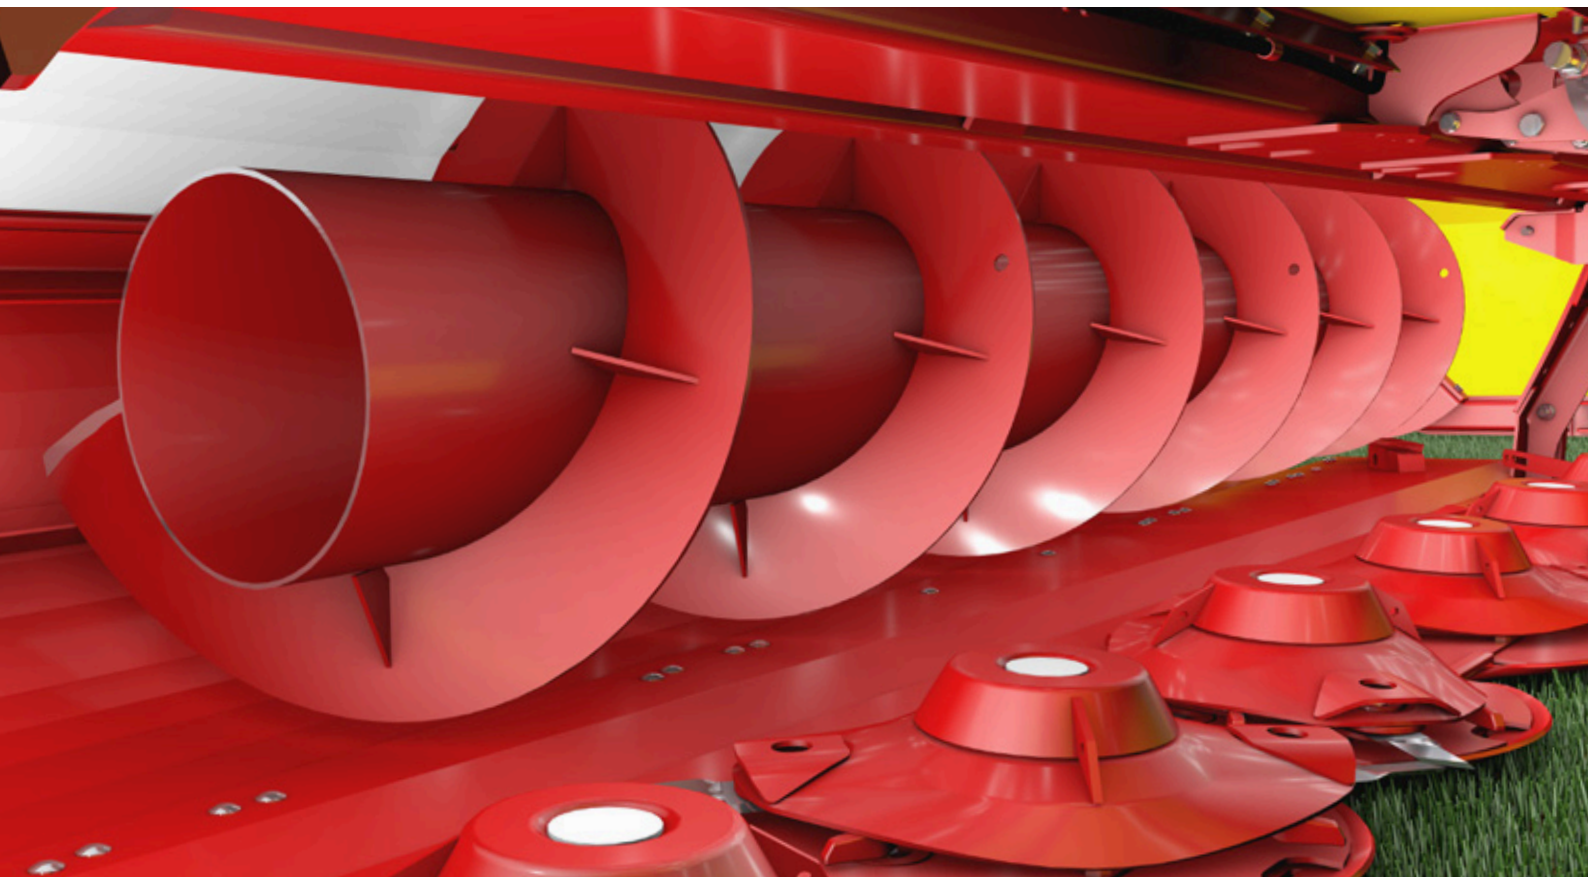

Swath merging without a conditioner

CROSS FLOW is a cost effective system for merging swaths. A cross flow auger is integrated in the mower unit to deposit the forage in the way you want it to be: Either merged as a swath or spread over the working width of the rear mower.

CROSS FLOW is available for the NOVACAT 302 with a working width of 3.04 m and the NOVACAT 352 with a working width of 3.46 m.

Best forage

Dispensing with the conditioner means that your forage is handled with minimum impact. The forage flows through the closed duct directly from the sward to the swath. Dirt ingress is reduced to a minimum. In addition, disintegration losses are avoided.

Cost effectiveness

CROSS FLOW works without a conditioner and is characterised by its light tare weight compared to conventional swath merging systems. This not only conserves the soil, but also saves fuel: In comparison to the cross conveyor belt system, with CROSS FLOW 20% less power is required.

You can operate the narrower model with tractors starting at 100 hp. It doesn't get more cost effective than this.

Maximum output

The auger is installed in the mower at a slight angle. This ensures optimum throughput. Even large volume crops and whole plant silage are placed in a clean and tidy swath at a high output. Scraper bars on the rear panel of the auger ensure blockage-free operation with a wide variety of forage conditions.



NOVADISC, NOVACAT



Hydraulic rear panel opening

For even more convenience, the rear panel can be opened hydraulically from the comfort of the tractor seat. This makes the system ideal for flexible applications.

The CROSS FLOW system is versatile in the range of applications that it offers to make your working day in the field a great deal easier.

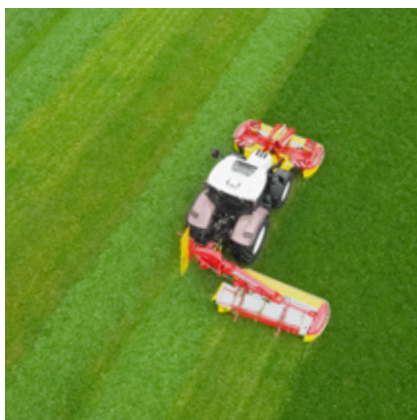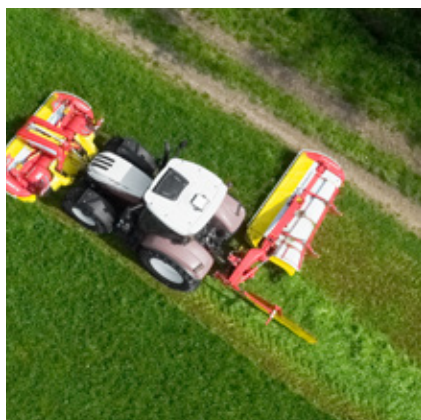

Easy swath placement

The swath is placed so that you can pick up and transport your forage away directly after mowing. The optional swath curtain guarantees a clean and tidy swath shape that can be picked up straight away by the loader wagon and the baler. The hydraulic folding gives you maximum flexibility.

Intelligent mowing

When mowing along the field boundary, the cross flow auger can transport the crop to the inside. This ensures that your forage remains inside the field boundary during the subsequent tedding process.

Intelligent swath placement

When the rear flap is closed, the cross flow auger transports the crop to the centre of the swath of the front mower. With the swath curtain folded up, a loose and even swath is placed.

In combination with a 3 metre front mower, you can mow a width of 12 metres in two lanes, but place the two swaths within approx. 6 metres. One twin rotor centre-swath rake is then sufficient on the next pass. In this way you can significantly reduce the number of passes and conserve the soil as well as your forage. You also save valuable time and fuel.

Wide spread placement

For a more intensive drying effect, open the rear flap to place a wider and airier blanket of forage.

You benefit from a light conditioning effect because the cross flow auger turns the crop as it flows through to accelerate the drying of the forage.

Digital agricultural machinery

Software

HARVEST ASSIST – optimising forage harvesting

Achieve higher harvesting performance by using the free HARVEST ASSIST app. The app optimises the sequences between the mowers, tedders, rakes, mergers, loader wagons, round balers, and other individually configurable machines. This avoids delivery peaks at the clamp. The result is a mass flow-dependent field processing sequence for dynamic harvesting. The compaction vehicle at the clamp can then neatly distribute and compact each load of crop delivered one by one to produce the best forage.



Clear and intuitive

The status of each field is colour coded to indicate whether it is currently being processed, ready for the next process or whether harvesting has already been completed. This way, everyone in the team can see what is happening in which field right now.

For intuitive operation


The app can be opened on your smartphone, so no additional hardware is required. You will quickly find your way around, because the app is designed so intuitively. For easy documentation, the each load is counted based on GPS data to determine the yield.



This QR code takes you directly to the application.

HAYTOOL ASSIST – the right tedder for the mower

Match your tedder to the working width of your mower to get the highest utilisation and best work quality from your machines. The best spreading quality is achieved when the tedder completely covers the swath of mowed grass on each pass. And ideally, the tractor should drive along a forage-free lane. The forage then remains loose on top of the grass stubble, making it an easy target for the tines. HAYTOOL ASSIST helps you quickly and easily find the right tedder for your mower.

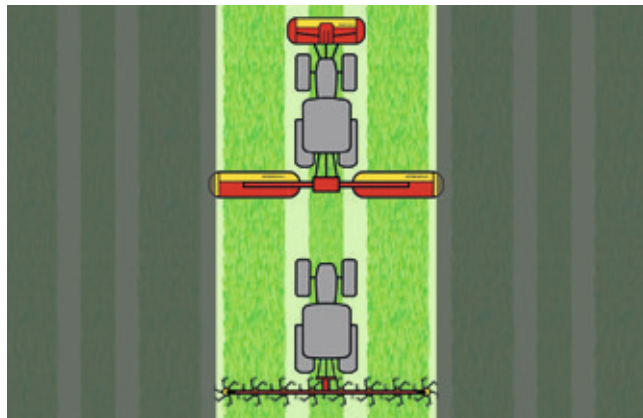

Select your mower(s)

In the first step, you can combine front mowers with rear mowers or mower combinations, or select them individually. You can determine important options yourself:

- Mowing strategy (driving in a circle or mowing in passes)
- Number of swathing discs or swath width for mower with conditioner
- Mounting width for rear-mounted mowers or mower combinations

The mower swaths are displayed directly in an image according to your settings.

Find the right tedder

In the next step, you can select the tedder from our wide product range. The image shows at a glance whether the working width of the tedder matches the mower. For the best overview, the area not covered is darkened.

You can move the tedder left and right to try out all the possible configuration options.



This QR code takes you directly to the application.

Compatible products

SENSOSAFE



Wildlife in the crop

The timing of the first cut in grassland farming coincides with the fawning season of roe deer and other wild animals. Due to their natural reflex to seek cover, fawns do not run away from danger. This instinctive behaviour makes it especially difficult to spot animals hiding in the grass. It happens over and over again that animals are seriously injured or even killed during mowing.

Livestock also endangered

If the carcass of a wild animal ends up in the clamp, it will decompose and contaminate the forage. Under anaerobic conditions, bacteria of the species *Clostridium botulinum* produce the neurotoxin botulinum.

Feeding silage contaminated in this way can expose cattle, sheep, horses and poultry to life-threatening botulism.


Mowers raised

SENSOSAFE is an automated sensor-based assistance system that detects animals; during mowing it enables you to identify fawns and other wild animals hiding in the field and to save them from getting caught by the mower. You prevent carcasses from contaminating your forage and avoid the risk of your cattle contracting botulism. This system helps you protect wildlife and your livestock at the same time.

With SENSOSAFE you complete two tasks in one: Mowing and detecting wildlife. No additional time or personnel needed for searching the fields prior to mowing. What's more, you don't need special training or a permit to operate the SENSOSAFE system.

NOVADISC, NOVACAT

A bar with near infrared sensors is mounted in front of the mower. These work independently of daylight and temperature. Unlike thermal imaging cameras, you can rely on SENSOSAFE to work properly in all types of operating conditions.

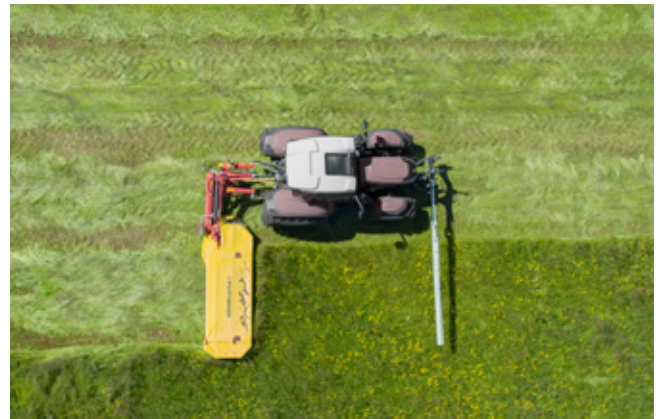

SENSOSAFE

The sensor bar is mounted directly on the front mower. If the sensors detect an animal, the mower's hydraulics system automatically raises the front mower. In addition, it sends a signal to the tractor cab so that the driver can stop the tractor.

SENSOSAFE is available as an option for NOVACAT ALPHA MOTION MASTER and PRO mowers.

SENSOSAFE 300

SENSOSAFE 300 is fitted to a mounting frame and utilises the tractor's hydraulics. The sensors send a signal to the tractor cab if anything is detected.

When used with a rear mower, the system is mounted on the front hitch hydraulics. This gives the driver plenty of time to stop the tractor and raise the mower.

When used with a front mower, the system scans the next pass. SENSOSAFE can be mounted on either the front or rear hitch hydraulics.

SENSOSAFE 300 is manufacturer-independent and can be used with your existing mower.

For more details, see our SENSOSAFE brochure.

Equipment options



NOVACAT front-mounted mowers

Swathing discs
inner / outer

Additional swathing
discs

Feed cones

Feed drums to
form 2 individual
swaths

NOVACAT F 2700 / F 3100	<input type="checkbox"/>	-	<input type="checkbox"/>	<input type="checkbox"/>
NOVACAT F 3100 OC	<input type="checkbox"/>	-	<input type="checkbox"/>	<input type="checkbox"/>
NOVACAT 261 ALPHA MOTION MASTER / PRO	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
NOVACAT 261 ALPHA MOTION PRO ED / RC	-	-	<input type="checkbox"/>	-
NOVACAT 301 ALPHA MOTION MASTER / PRO	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
NOVACAT 301 ALPHA MOTION PRO ED / RC	-	-	<input type="checkbox"/>	-
NOVACAT 351 ALPHA MOTION MASTER / PRO	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
NOVACAT 351 ALPHA MOTION PRO ED / RC	-	-	<input type="checkbox"/>	-

NOVACAT rear mowers with centre pivot mounting

NOVACAT 262	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
NOVACAT 262 ED / RC	-	-	<input type="checkbox"/>	-
NOVACAT 302	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
NOVACAT 302 CF	-	-	<input checked="" type="checkbox"/>	-
NOVACAT 302 ED / RC	-	-	<input type="checkbox"/>	-
NOVACAT 352 V	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
NOVACAT 352	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
NOVACAT 352 ED / RC	-	-	<input type="checkbox"/>	-
NOVACAT 352 CF	-	-	<input checked="" type="checkbox"/>	-
NOVACAT 402 / 442	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NOVACAT 402 ED	-	-	<input type="checkbox"/>	<input type="checkbox"/>

NOVADISC rear mowers with side pivot mounting

NOVADISC 222	<input type="checkbox"/>	-	<input type="checkbox"/>	-
NOVADISC 262, 302, 352	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-

NOVACAT T trailed mowers

NOVACAT 307 T ED	-	-	-	-
NOVACAT 307 T RC	-	-	-	-
NOVACAT 307 T ED / RC COLLECTOR	-	-	-	-
NOVACAT 3007 T ED	-	-	-	-
NOVACAT 3007 T RC	-	-	-	-
NOVACAT 3007 T ED / RC COLLECTOR	-	-	-	-
NOVACAT 3507 T ED	-	-	-	-
NOVACAT 3507 T RC	-	-	-	-
NOVACAT 3507 T ED / RC COLLECTOR	-	-	-	-

■ = Standard, □ = Optional

Technical data



NOVACAT front-mounted mowers	Working width	Mounting	PTO speed	Hectares per hour up to acres/h / ha/h
NOVACAT F 2700	2.62 m	Cat. 2	1000 rpm	2.60
NOVACAT F 3100	3.04 m	Cat. 2	1000 rpm	3.00
NOVACAT F 3100 OC	3.04 m	Cat. 2	1000 rpm	3.00
NOVACAT 261 ALPHA MOTION MASTER	2.62 m	Cat. 2	1000 rpm	2.60
NOVACAT 261 ALPHA MOTION PRO	2.62 m	Cat. 2	1000 rpm	2.60
NOVACAT 261 ALPHA MOTION ED PRO	2.62 m	Cat. 2	1000 rpm	2.60
NOVACAT 261 ALPHA MOTION RC PRO	2.62 m	Cat. 2	1000 rpm	2.60
NOVACAT 301 ALPHA MOTION MASTER	3.04 m	Cat. 2	1000 rpm	3.00
NOVACAT 301 ALPHA MOTION PRO	3.04 m	Cat. 2	1000 rpm	3.00
NOVACAT 301 ALPHA MOTION ED PRO	3.04 m	Cat. 2	1000 rpm	3.00
NOVACAT 301 ALPHA MOTION RC PRO	3.04 m	Cat. 2	1000 rpm	3.00
NOVACAT 351 ALPHA MOTION MASTER	3.46 m	Cat. 2	1000 rpm	3.40
NOVACAT 351 ALPHA MOTION PRO	3.46 m	Cat. 2	1000 rpm	3.40
NOVACAT 351 ALPHA MOTION ED PRO	3.46 m	Cat. 2	1000 rpm	3.40
NOVACAT 351 ALPHA MOTION RC PRO	3.46 m	Cat. 2	1000 rpm	3.40



NOVADISC rear mowers with side pivot mounting	Working width	Mounting	PTO speed	Hectares per hour up to acres/h / ha/h
NOVADISC 222	2.20 m	Cat. 2, Cat. 3N	540 rpm	2.20
NOVADISC 262	2.62 m	Cat. 2, Cat. 3N	540 rpm	2.60
NOVADISC 302	3.04 m	Cat. 2, Cat. 3N	540 rpm	3.00
NOVADISC 352	3.46 m	Cat. 2, Cat. 3N	1000 rpm	3.40

NOVACAT rear mowers with centre pivot mounting	Working width	Mounting	PTO speed	Hectares per hour up to acres/h / ha/h
NOVACAT 262	2.62 m	Cat. 2, Cat. 3N	1000 rpm	2.60
NOVACAT 262 ED	2.62 m	Cat. 2, Cat. 3N	1000 rpm	2.60
NOVACAT 262 RC	2.62 m	Cat. 2, Cat. 3N	1000 rpm	2.60
NOVACAT 302	3.04 m	Cat. 2, Cat. 3N	1000 rpm	3.00
NOVACAT 302 CF	3.04 m	Cat. 3	1000 rpm	3.00
NOVACAT 302 ED	3.04 m	Cat. 3N	1000 rpm	3.00
NOVACAT 302 RC	3.04 m	Cat. 3N	1000 rpm	3.00
NOVACAT 352 V	3.46 m	Cat. 3N	1000 rpm	3.40
NOVACAT 352	3.46 m	Cat. 3	1000 rpm	3.40
NOVACAT 352 CF	3.46 m	Cat. 3	1000 rpm	3.40
NOVACAT 352 ED	3.46 m	Cat. 3	1000 rpm	3.40
NOVACAT 352 RC	3.46 m	Cat. 3	1000 rpm	3.40
NOVACAT 402	3.88 m	Cat. 3	1000 rpm	4.00
NOVACAT 402 ED	3.88 m	Cat. 3	1000 rpm	4.00
NOVACAT 442	4.30 m	Cat. 3	1000 rpm	4.50

Cat. 2 = dia. 2 / width 2, Cat. 3N = dia. 3 / width 2, Cat. 3 = dia. 3 / width 3

NOVADISC, NOVACAT

Mower discs	Placement width without swathing discs	Placement width 2 / 4 swathing discs	Transport width	Weight
6	1.70 m	1.20 m / –	2.57 m	650 kg
7	2.10 m	1.40 m / –	2.98 m	680 kg
7	2.10 m	1.40 m / –	2.98 m	690 kg
6	1.70 m	1.30 m / 1.10 m	2.57 m	845 kg
6	1.70 m	1.30 m / 1.10 m	2.57 m	865 kg
6	–	–	2.57 m	1065 kg
6	–	–	2.57 m	1115 kg
7	2.10 m	1.40 m / 1.10 m	2.98 m	885 kg
7	2.10 m	1.40 m / 1.10 m	2.98 m	905 kg
7	–	–	2.98 m	1145 kg
7	–	–	2.98 m	1215 kg
8	2.60 m	2.00 m / 1.60 m	3.42 m	965 kg
8	2.60 m	2.00 m / 1.60 m	3.42 m	985 kg
8	–	–	3.42 m	1265 kg
8	–	–	3.42 m	1315 kg

Mower discs	Placement width without swathing discs	Placement width 2 / 4 swathing discs	Transport height	Weight
5	1.30 m	0.90 m / –	2.57 m	635 kg
6	1.70 m	1.50 m / 1.10 m	2.96 m	675 kg
7	2.30 m	1.70 m / 1.30 m	3.34 m	715 kg
8	2.50 m	2.10 m / 1.70 m	3.78 m	760 kg

Mower discs	Placement width without swathing discs	Placement width 2 / 4 swathing discs	Transport height / length	Weight
6	1.70 m	1.40 m / 1.10 m	3.60 m / –	910 kg
6	–	–	3.60 m / –	1160 kg
6	–	–	3.60 m / –	1240 kg
7	2.10 m	1.70 m / 1.30 m	3.80 m / –	930 kg
7	–	–	– / 4.70 m	1400 kg
7	–	–	3.80 m / –	1260 kg
7	–	–	3.80 m / –	1330 kg
8	2.50 m	2.10 m / 1.70 m	3.99 m / –	1030 kg
8	2.50 m	2.10 m / 1.70 m	– / 5.20 m	980 kg
8	–	–	– / 5.20 m	1460 kg
8	–	–	– / 5.20 m	1340 kg
8	–	–	– / 5.20 m	1390 kg
9	3.20 m	2.70 m / 2.30 m	– / 5.62 m	1040 kg
9	–	–	– / 5.62 m	1390 kg
10	3.60 m	3.00 m / 2.60 m	– / 6.04 m	1080 kg



MyPÖTTINGER

This QR code takes you directly to the website.



Benefit from numerous advantages

MyPÖTTINGER is our customer portal that provides you with key information about your PÖTTINGER machines.



My machines

Add your PÖTTINGER machinery to “My machines” and assign a name. You will receive valuable information such as: useful tips on your machine, operating instructions, spare parts lists, maintenance information, as well as all the technical details and documentation.

Info on the product range

MyPÖTTINGER provides you with machine-specific information for all machines from year of build 1997 onwards.

Scan the QR code on the machine's data plate with a smartphone or tablet or go to www.mypoettinger.com and enter the machine number from the comfort of your own home. You will immediately receive all the information on your machine such as the instruction manual, equipment options, brochures, photos and videos.

If you want it to last,
you want the
original.



This QR code takes you directly
to the website.

 **PÖTTINGER**
Original Parts

ORIGINAL PARTS



Regardless of whether you've got a new machine or a classic, our spare parts logistics centre stocks over 55,000 parts to give our machines an extended service life. Thanks to the many local warehouses in 13 countries and a large network of dealerships, original parts are available in over 60 countries.



Finding the right parts is easy

Our digital services are available free of charge and have largely replaced paper-based spare parts lists:

- www.mypoettinger.com provides free access to machine documentation on your smartphone and tablet.
- [agoparts](#) offers an intuitive search function to pinpoint the correct parts. This eliminates the risk of placing the wrong order.

No worries with the original

Too short, wrong hole pattern, wears out quickly? You don't get these problems with an original part. And there are many more advantages:

- Immediate and long-term spare parts availability
- Maximum service life
- Perfect fit
- Attractive and competitive prices



More success with PÖTTINGER

- Your reliable partner, as a family-owned company since 1871
- Specialist for arable and grassland
- Future-safe innovation for outstanding working results
- Roots in Austria – at home throughout the world

You can rely on our PÖTTINGER disc mowers

- Best forage thanks to perfect ground tracking
- First class cutting quality with the field-proven PÖTTINGER cutter bar
- High quality design of strong and reliable mowers
- Straightforward and convenient operation

Ask for more information:

PÖTTINGER Landtechnik GmbH

Industriegelände 1
4710 Grieskirchen
Austria
Phone +43 7248 600-0
info@poettinger.at
www.poettinger.at

POETTINGER Australia Pty. Ltd.

11 Efficient Drive
Truganina VIC 3029
Australia
Phone +61 3 8353 2770
info@poettinger.com.au
www.poettinger.com.au

Alois PÖTTINGER UK Ltd.

15 St Marks Road
Corby Northamptonshire,
NN18 8AN
United Kingdom
Phone + 44 1536 272 220
info@pottinger.uk
www.pottinger.uk

POETTINGER Ireland Ltd.

Glenaleamy, Powerstown Road,
Clonmel, Co. Tipperary
Ireland
Phone +353 52 6125766
info@poettinger.ie
www.poettinger.ie



Your local
PÖTTINGER partner