

TERRADISC

PÖTTINGER TERRADISC 8001 T / 10001 T trailed disc harrows



The advantages at a glance.

The specialist in shallow soil preparation

Ground tracking

Perfect ground tracking with $+6^\circ$ / -3° freedom of movement

At the headland the TERRADISC is raised on the rear rollers for turning

Optimum consolidation

Uniform working depth

Reliability

Harvest residues are incorporated blockage-free

Perfect seedbed preparation

Reliable ground penetration even in dry conditions

Great soil movement and the ideal tilth

High output

Eats up the hectares at a speed of up to 11 mph / 18 km/h and a working depth of 5.91" / 150 mm

Safety during transport


Compact transport dimensions thanks to horizontal folding sections

Transport width 9.84' / 3.0 m

Transport height 13.12' / 4.0 m



TERRADISC 8001 T / 10001 T

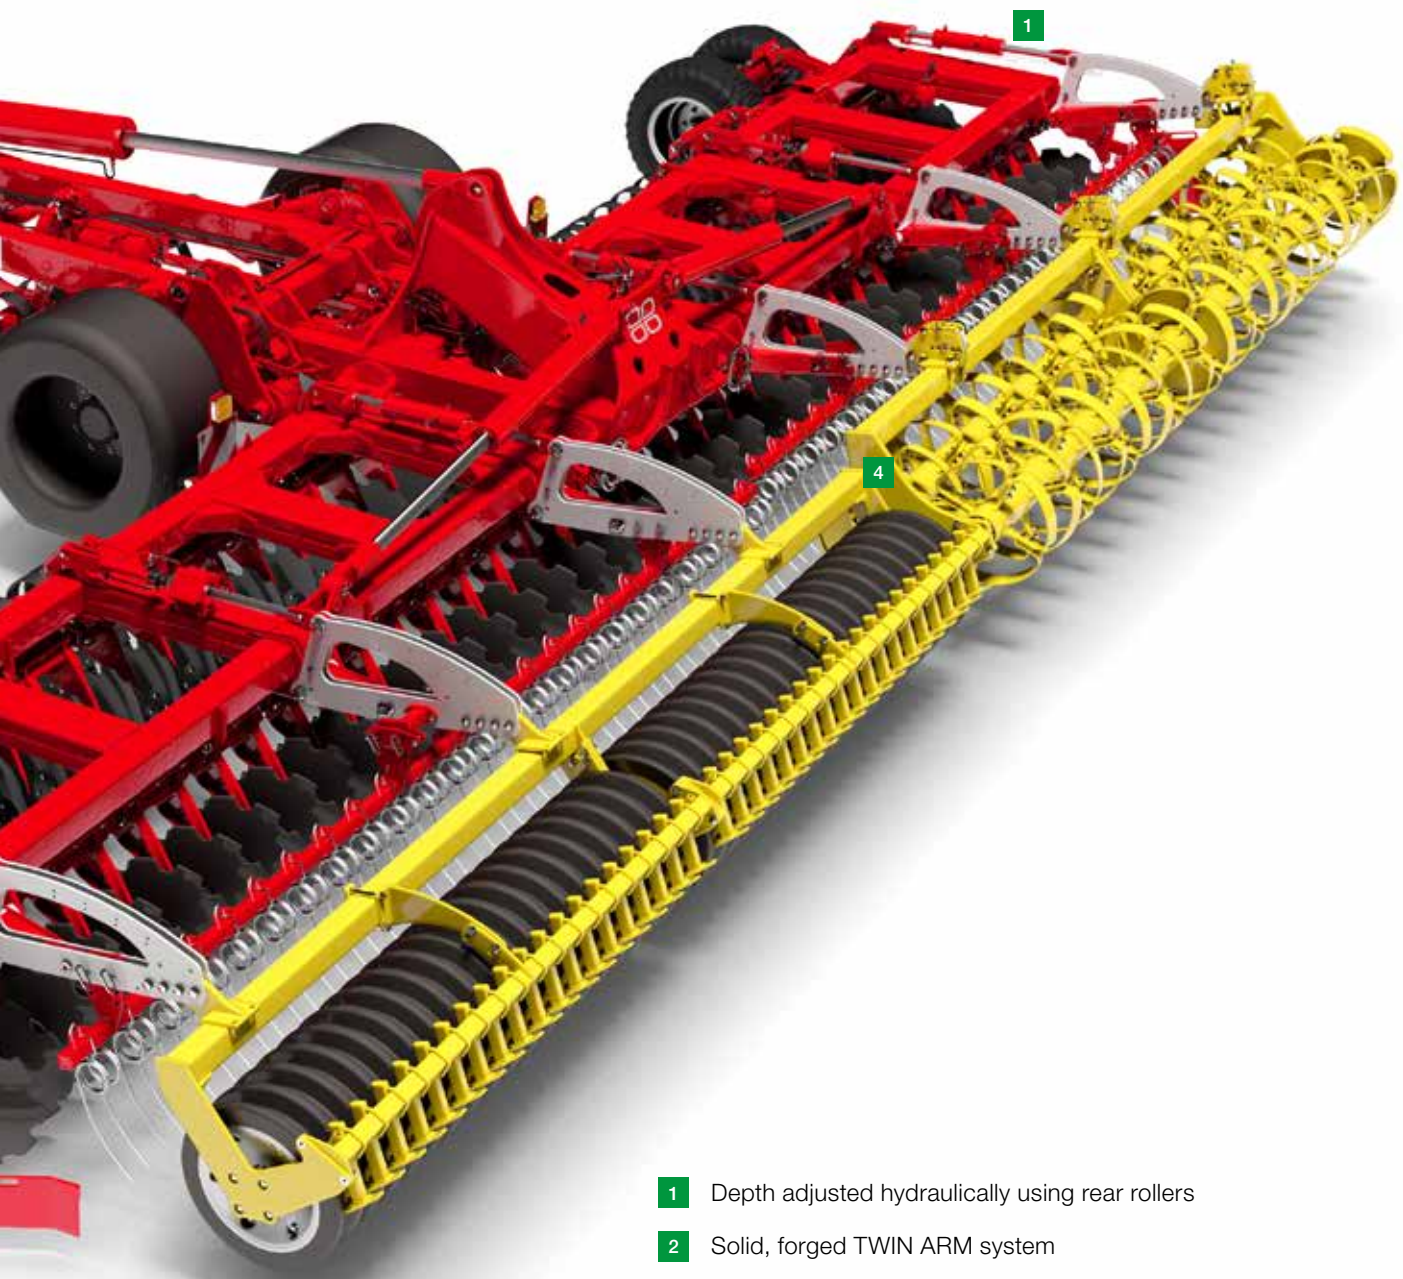

- 1 Depth adjusted hydraulically using rear rollers
- 2 Solid, forged TWIN ARM system
- 3 Large wheels for perfect ground tracking
- 4 Choice of rear rollers for optimum consolidation



Technical data

TERRADISC	8001 T	10001 T
Working width	26.25 ft / 8 m	32.81 ft / 10 m
Transport width	9.84 ft / 3 m	9.84 ft / 3 m
Discs	64	80
Disc diameter	22.83 inch / 580 mm	22.83 inch / 580 mm
Disc spacing	4.92 inch / 125 mm	4.92 inch / 125 mm
Row spacing	35.43 inch / 900 mm	35.43 inch / 900 mm
Frame height	29.53 inch / 750 mm	29.53 inch / 750 mm
Power requirement from	198 kW / 270 hp	265 kW / 360 hp
Basic weight with roller approx.	20944 lbs / 9500 kg	25353 lbs / 11500 kg

The key features

- Chassis doubles as a folding and transport system
- Pneumatic brakes optional, 11.48 ft / 3.5 m axle version optional
- Cage roller, pack ring roller, rubber packer roller, or tandem CONOROLL
- Disc diameter 22.83 inch / 580 mm – harvest residues are worked in blockage-free
- Large tracking wheels – high output with working speeds of up to 11 mph / 18 km/h
- Proven TWIN ARM system with very wide clamping brackets
- Maintenance-free disc bearings
- NONSTOP protection against stones
- Hydraulic rear roller suspension
- Hydraulic anti-crabbing system
- Convenient operation, also available with ISOBUS

All information and images relating to technical data, dimensions, weights, output, etc. are approximate and are not binding.

PÖTTINGER Landtechnik GmbH

Industriegelände 1, 4710 Grieskirchen, Austria

Phone +43 7248 600-0, info@poettinger.at, www.poettinger.at

PÖTTINGER